


Changeover Valves (COVs) and (COVCs)




SERIES 320B

- CE Approved, ASME BPVC, ASME B 16.34, API 520-2, AD 2000 S1, ISO 4126
- Standard sizes: ½" to 20"
- Pressure rating: Class 150 to 600, 10.3 to 41.4 barg
- Temperature Range:
 - 320.8 to 1202°F, -196 to 650°C
- Materials:
 - Carbon steel
 - Stainless steel
 - Alloy Steels
- Options:
 - Electric or pneumatic actuation
 - Hand wheel with locking device
 - Limit switches
 - Heating jacket
 - Drain connections
- Applications:
 - Air, steam, gas, water & chemicals

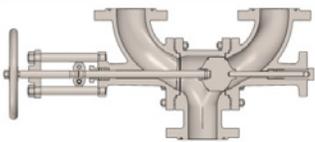

SERIES 370B Bellows Sealed Stem


- CE Approved, ASME BPVC, ASME B 16.34, API 520-2, AD 2000 S1, ISO 4126
- Standard sizes: ½" to 20"
- Pressure rating: Class 150 to 300, 10.3 to 20.7 barg
- Temperature Range:
 - 320.8 to 1202°F, -196 to 650°C
- Materials:
 - Low carbon steel
 - Carbon steel
 - High temperature carbon steel
 - Stainless steel, Inconel, Hastelloy
 - Chrome-Moly and other special Alloys
- Options:
 - Hand wheel with locking device
 - Final position switch
 - Heating jacket
 - Drain & flushing hole
- Applications:
 - Air, steam, gas, water, & chemicals, including toxic, aggressive, flammable fluids, VOCs

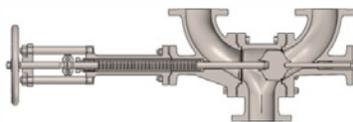

SERIES 320.1B/370.1B

Interlocked changeover valve combination:

Farris offers changeover valves for critical services involving toxic, aggressive, or corrosive fluids that pose a threat to people, plant, or environment, and for instances when it is required to discharge into a closed collection system. Changeover valve combinations provide the mechanical link of two COVs, one upstream and one downstream of the safety relief devices. The mechanical link allows operating both valves into the same direction at the same time and therefore is critical in preventing the involuntary isolation of the safety relief devices

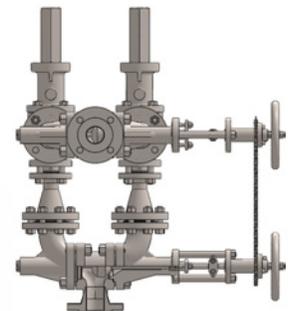

CURTISS - WRIGHT

Farris Engineering, a business unit of Curtiss-Wright

Headquarters: 10195 Brecksville Road, Brecksville, OH 44141 USA • Telephone: 440-838-7690 • Fax: 440-838-7699 • www.cw-valvegroup.com/farris

Facilities: Brecksville, Ohio, USA; Brantford, Ontario, Edmonton, Alberta, Canada; Corby, Northants, UK; São Carlos-SP, Brazil; Delhi, India; Tianjin, Beijing, China

Offices Worldwide: For a listing of our global sales network, visit our website at <http://www.cw-valvegroup.com/FarrisDistributors>.

While this information is presented in good faith and believed to be accurate, Farris Engineering, division of Curtiss-Wright Flow Control Corporation, does not guarantee satisfactory results from reliance on such information. Nothing contained herein is to be construed as a warranty or guarantee, expressed or implied, regarding the performance, merchantability, fitness or any other matter with respect to the products, nor as a recommendation to use any product or process in conflict with any patent. Farris Engineering, division of Curtiss-Wright Flow Control Corporation, reserves the right, without notice, to alter or improve the designs or specifications of the products described herein.