




CE 0036



**Non Return Valve Type DTEF  
DN015 - 150**

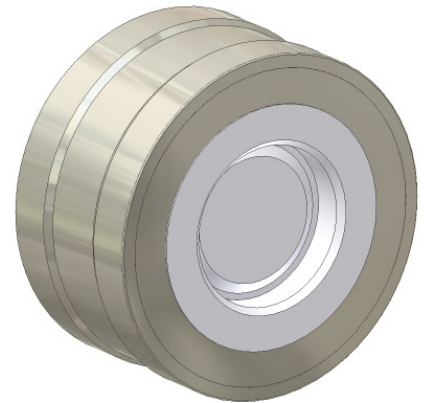

Designation	Material
Supporting ring	St. steel 1.4301
Body	see table
Valve plate	see table
Spring cap	see Pricelist
Spring	Hastelloy C4, PFA coated

**Technical specifications**

Placement between flange according to DIN EN 1092-1, PN10-40


Nominal pressure max. PN10

Overall lengths according to DIN EN 558-2, Gr. 52

Tightness according to DIN EN 12266-1, Leakage Rate D (Sealing M and T) and Leakage Rate A (Sealing E, P, V)

Operational limits according to DIN EN 1092-1

Identification according to DIN EN 19

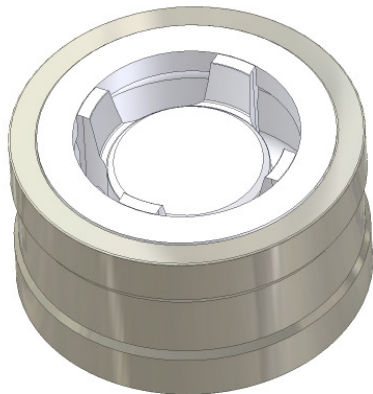

**Utilisation**

For aggressive liquids, gases and steams in all process technology.

**Constructional features**

Parts which are in contact with the medium are made of PTFE or other high-quality synthetics.

The supporting ring chambers the body and protects from lateral flange pressure.

Guiding of valve plate by the ribs of the spring cap.

The Hastelloy C4 spring is coated with a PTFE/PFA tube and welded on the ends.

**Special types**

On request

**Designation: DTEF- 75 75 - T - 100**  
**DTEF- □□ - □□ - □ - □□□ → DN015 - 150**

Body		Valve plate		Soft sealing		
Material	Code	Material	Code	Material	Temperatur	Code
PTFE+25% glass	75	PTFE+25% glass	75	Without sealing		M
TFM/PTFE cond. FDA	87	TFM/PTFE cond. FDA	87	PTFE	-200 bis 200°C	T
				VITON	-20 bis 200°C	V
				EPDM	-50 bis 130°C	E
				NBR	-30 bis 120°C	P



CE 0036



**ChemValve-Schmid**  
Armaturentechnik




2008/09 :: | ::www.chemvalve-schmid.com:: | ::info@chemvalve-schmid.com:: | ::T:+41 32 639 50 10:: | ::F:+41 32 639 50 15::

**::Data Sheet:: | ::Chapter 5::**

Seite 2/2

::Non Return Valve Type DTEF:: | ::DN015 - 150:: | ::PN10::

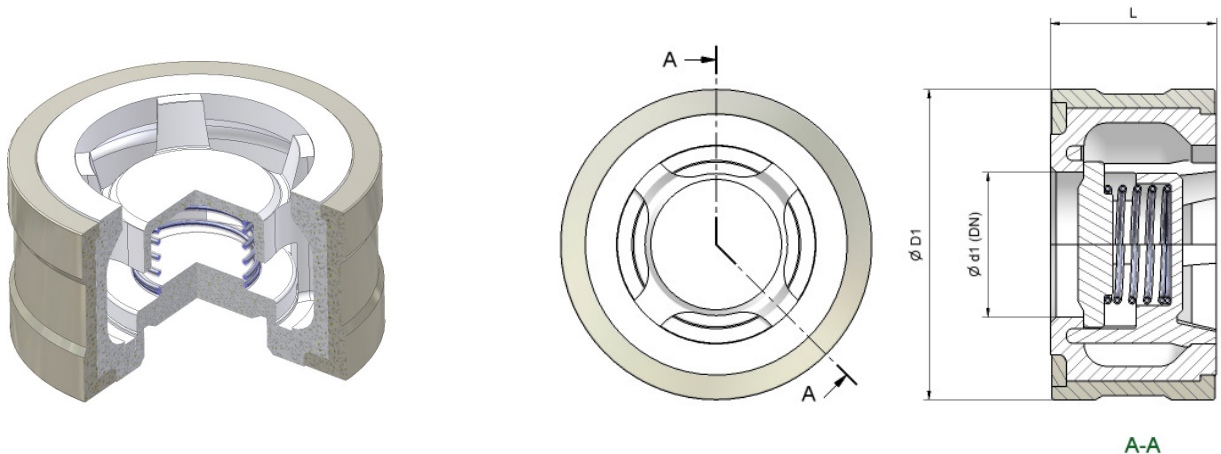

DN (mm)	015	020	025	032	040	050	065	080	100	125	150
DN (zoll)	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
L	25	31.5	35.5	40	45	56	63	71	80	90	106
Ø D, PN10	51	61	71	82	92	107	127	142	162	192	218
Weight	0.1	0.3	0.4	0.55	0.8	1.3	2	2.5	3.6	5	7

**Opening pressures (mbar)**

DN (mm)	015	020	025	032	040	050	065	080	100	125	150
DN (zoll)	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
ΔP ↑	25	25	25	27	28	29	30	31	33	33	35
ΔP →	20	20	20	20	20	20	20	20	20	20	20
ΔP ↓	15	15	15	13	12	11	10	9	7	7	5

**Pressure drop diagramm**

Pressure drop diagram for water at 20°C with opened valve and horizontal flow.  
For calculating the pressure drop of the medium the equivalent water flow volume has to be calculated..

$$\dot{V}_w = \dot{V} \sqrt{\frac{\rho}{1000}}$$

- $\dot{V}_w$  = Equivalent water flow volume in m3/h
- $\rho$  = Density of the medium (in use) kg/m3
- $\dot{V}$  = Flow volume of the medium (in use) in m3/h

